


TB826 (Single Mode)

System 800xA hardware selector

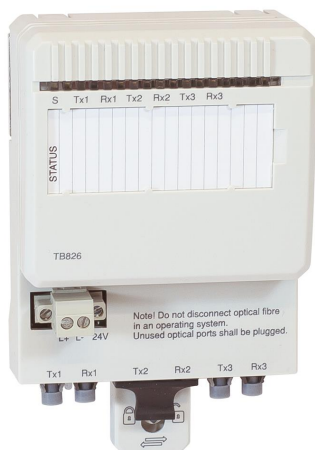

S800 I/O is a comprehensive, distributed and modular process I/O system that communicates with parent controllers and PLCs over industry-standard field buses. TB826 is a Long range Optical Media Converter for the ModuleBus. It is used to convert between plastic/opto fiber of HCS fiber with versatile link connectors and single mode field fiber with SC connector.

The TB826 is built in S800L mechanics and DIN rail mounted. TB826 allows distribution of the optical ModuleBus up to 5000 m per cluster in star configurations.

Features and benefits

- Converts between plastic or HCS opto fiber and glass optical fiber
- DIN rail mounted
- Allows distribution of optical ModuleBus up to 5000 m per cluster in star configurations
- S800L mechanics

General info	
Article number	3BSE061637R1
Protocol	ABB's Modulebus
Master or slave	Slave
Line redundancy	No
Module redundancy	No
Hot Swap	No
Used together with HI Controller	Yes

Detailed data	
24 V consumption typ.	96 mA

Environment and certification	
Temperature, Operating	0 to +55 °C
Temperature, Storage	-25 to +70 °C
Pollution degree	Degree 2, IEC 60664-1
Corrosion protection	ISA-S71.04: G3
Relative humidity	5 to 95 % no condensation
Protection class	IP20 according to EN60529, IEC 529
CE- marking	Yes
Electrical Safety	IEC 61131-2, UL 61010-1, UL 61010-2-201
Hazardous location	C1 Div 2 cULus, C1 Zone 2 cULus, ATEX Zone 2
Marine certificates	-
RoHS compliance	DIRECTIVE/2011/65/EU (EN 50581:2012)
WEEE compliance	DIRECTIVE/2012/19/EU

Dimensions	
Height	136 mm (5.35 in.) including latch
Width	85.6 mm (3.37 in.)
Depth	58.5 mm (2.30 in.)
Weight	0.21 kg (0.46 lbs)

solutions.abb/800xA
solutions.abb/controlsystems

800xA is a registered or pending trademark of ABB. All rights to other trademarks reside with their respective owners.

We reserve the right to make technical changes to the products or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not assume any responsibility for any errors or incomplete information in this document.

We reserve all rights to this document and the items and images it contains. The reproduction, disclosure to third parties or the use of the content of this document – including parts thereof – are prohibited without ABB's prior written permission.

Copyright© 2022 ABB All rights reserved