## SIEMENS

## Data sheet

## 3RV2021-1GA20



Circuit breaker size S0 for motor protection, CLASS 10 A-release 4.5...6.3 A N-release 82 A Spring-type terminal Standard switching capacity

product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For motor protection
product type designation	3RV2
General technical data	
size of the circuit-breaker	S0
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	7.25 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	2.4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation in networks with grounded star point	
<ul> <li>between main and auxiliary circuit</li> </ul>	400 V
<ul> <li>between main and auxiliary circuit</li> </ul>	400 V
shock resistance acc. to IEC 60068-2-27	25g / 11 ms
mechanical service life (switching cycles)	
<ul> <li>of the main contacts typical</li> </ul>	100 000
<ul> <li>of auxiliary contacts typical</li> </ul>	100 000
electrical endurance (switching cycles) typical	100 000
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 02 ATEX F 001
reference code acc. to IEC 81346-2	Q
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
<ul> <li>ambient temperature during operation</li> </ul>	-20 +60 °C
ambient temperature during storage	-50 +80 °C
ambient temperature during transport	-50 +80 °C
temperature compensation	-20 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the	4.5 6.3 A



current-dependent overload release	
<ul> <li>operating voltage rated value</li> </ul>	690 V
<ul> <li>operating voltage at AC-3 rated value maximum</li> </ul>	690 V
operating frequency rated value	50 60 Hz
operational current rated value	6.3 A
operational current at AC-3 at 400 V rated value	6.3 A
operating power at AC-3	
at 230 V rated value	1 500 W
at 400 V rated value	2 200 W
at 500 V rated value	3 000 W
at 690 V rated value	4 000 W
operating frequency at AC-3 maximum	15 1/h
Auxiliary circuit	
	0
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
<ul> <li>ground fault detection</li> </ul>	No
<ul> <li>phase failure detection</li> </ul>	Yes
trip class	CLASS 10
design of the overload release	thermal
breaking capacity operating short-circuit current (Ics) at AC	
<ul> <li>at 240 V rated value</li> </ul>	100 kA
<ul> <li>at 400 V rated value</li> </ul>	100 kA
<ul> <li>at 500 V rated value</li> </ul>	100 kA
<ul> <li>at 690 V rated value</li> </ul>	4 kA
breaking capacity maximum short-circuit current (Icu)	
<ul> <li>at AC at 240 V rated value</li> </ul>	100 kA
<ul> <li>at AC at 400 V rated value</li> </ul>	100 kA
<ul> <li>at AC at 500 V rated value</li> </ul>	100 kA
<ul> <li>at AC at 690 V rated value</li> </ul>	6 kA
response value current of instantaneous short-circuit trip unit	82 A
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	6.3 A
at 600 V rated value	6.3 A
yielded mechanical performance [hp]	
for single-phase AC motor	
- at 110/120 V rated value	0.25 hp
— at 230 V rated value	0.5 hp
for 3-phase AC motor	0.0 11
- at 200/208 V rated value	1 hp
- at 220/230 V rated value	1.5 hp
- at 460/480 V rated value	3 hp
- at 575/600 V rated value	5 hp
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715
height	119 mm
	r io min
	45 mm
width depth	45 mm 97 mm




required spacingImage: spacing of the space o	
- downwards30 mm- upwards30 mm- at the side9 mm• for live parts at 400 V9 mm- downwards30 mm- upwards30 mm- upwards9 mm- at the side9 mm• for grounded parts at 500 V9 mm- downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V9 mm- at the side90 mm- at the side90 mm- upwards30 mm- upwards90 mm	
upwards30 mm at the side9 mm• for live parts at 400 V9 mm downwards30 mm upwards30 mm at the side9 mm• for grounded parts at 500 V9 mm downwards30 mm upwards30 mm at the side9 mm• for grounded parts at 500 V	
- at the side9 mm• for live parts at 400 V downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- at the side9 mm	
<ul> <li>for live parts at 400 V</li> <li>downwards</li> <li>upwards</li> <li>at the side</li> <li>for grounded parts at 500 V</li> <li>downwards</li> <li>upwards</li> <li>at the side</li> <li>30 mm</li> <li>mm</li> </ul>	
- downwards30 mm- upwards30 mm- at the side9 mm• for grounded parts at 500 V downwards30 mm- upwards30 mm- upwards9 mm	
<ul> <li>for grounded parts at 500 V</li> <li>downwards</li> <li>upwards</li> <li>at the side</li> <li>mm</li> </ul>	
— at the side 9 mm	
for live north of EOO V/	
● for live parts at 500 V	
— downwards 30 mm	
— upwards 30 mm	
— at the side 9 mm	
<ul> <li>for grounded parts at 690 V</li> </ul>	
- downwards 50 mm	
— upwards 50 mm	
— backwards 0 mm	
— at the side 30 mm	
— forwards 0 mm	
● for live parts at 690 V	
— downwards 50 mm	
— upwards 50 mm	
— backwards 0 mm	
— at the side 30 mm	
— forwards 0 mm	
Connections/ Terminals	
product function removable terminal for auxiliary and No control circuit	
type of electrical connection	
for main current circuit     spring-loaded terminals	
for main current circuit spring-loaded terminals     arrangement of electrical connectors for main current     Top and bottom	
for main current circuit spring-loaded terminals     arrangement of electrical connectors for main current     circuit     Top and bottom	
arrangement of electrical connectors for main current circuit       Top and bottom         type of connectable conductor cross-sections	
arrangement of electrical connectors for main current circuit       Top and bottom         type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>for main contacts</li> </ul>	
arrangement of electrical connectors for main current circuit       Top and bottom         type of connectable conductor cross-sections <ul> <li>for main contacts</li></ul>	
arrangement of electrical connectors for main current circuit       Top and bottom         type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> <ul> <li>2x (1 10 mm²)</li> <li>2x (1 6 mm²)</li> </ul>	
arrangement of electrical connectors for main current circuit       Top and bottom         type of connectable conductor cross-sections       Top and bottom         • for main contacts       2x (1 10 mm²)         — finely stranded with core end processing       2x (1 6 mm²)         — finely stranded without core end processing       2x (1 6 mm²)	
arrangement of electrical connectors for main current circuit       Top and bottom         type of connectable conductor cross-sections       Top and bottom         • for main contacts       2x (1 10 mm²)         — solid or stranded       2x (1 6 mm²)         — finely stranded without core end processing       2x (1 6 mm²)         • at AWG cables for main contacts       2x (1 8 8)	
arrangement of electrical connectors for main current circuit       Top and bottom         type of connectable conductor cross-sections       Top and bottom         • for main contacts       2x (1 10 mm²)         — solid or stranded       2x (1 6 mm²)         — finely stranded without core end processing       2x (1 6 mm²)         • at AWG cables for main contacts       2x (1 8 8)         design of screwdriver shaft       Diameter 3 mm	
arrangement of electrical connectors for main current circuit       Top and bottom         type of connectable conductor cross-sections       Top and bottom         • for main contacts       2x (1 10 mm²)         — solid or stranded       2x (1 6 mm²)         — finely stranded with core end processing       2x (1 6 mm²)         • at AWG cables for main contacts       2x (1 8 8)         design of screwdriver shaft       Diameter 3 mm         size of the screwdriver tip       3,0 x 0,5 mm	
arrangement of electrical connectors for main current circuit       Top and bottom         type of connectable conductor cross-sections       Top and bottom         • for main contacts       2x (1 10 mm²)         — solid or stranded       2x (1 6 mm²)         — finely stranded with core end processing       2x (1 6 mm²)         — finely stranded without core end processing       2x (1 6 mm²)         • at AWG cables for main contacts       2x (1 8 8)         design of screwdriver shaft       Diameter 3 mm         size of the screwdriver tip       3,0 x 0,5 mm	
arrangement of electrical connectors for main current circuit       Top and bottom         type of connectable conductor cross-sections       • for main contacts         • for main contacts       2x (1 10 mm²)         — solid or stranded       2x (1 6 mm²)         — finely stranded with core end processing       2x (1 6 mm²)         • at AWG cables for main contacts       2x (1 8 8)         design of screwdriver shaft       Diameter 3 mm         size of the screwdriver tip       3,0 x 0,5 mm         Safety related data       B10 value	
arrangement of electrical connectors for main current circuit       Top and bottom         type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>finely stranded without core end processing</li> <li>at AWG cables for main contacts</li> <li>biameter 3 mm</li> <li>size of the screwdriver tip</li> <li>3,0 x 0,5 mm</li> </ul> <li>Safety related data</li> <li>B10 value         <ul> <li>with high demand rate acc. to SN 31920</li> <li>5 000</li> </ul> </li>	
arrangement of electrical connectors for main current circuit       Top and bottom         type of connectable conductor cross-sections       Top and bottom         • for main contacts       2x (1 10 mm²)         - solid or stranded with core end processing       2x (1 6 mm²)         - finely stranded without core end processing       2x (1 6 mm²)         • at AWG cables for main contacts       2x (1 8 8)         design of screwdriver shaft       Diameter 3 mm         size of the screwdriver tip       3,0 x 0,5 mm         Safety related data       5 000         proportion of dangerous failures       5 000	
arrangement of electrical connectors for main current circuit       Top and bottom         type of connectable conductor cross-sections       Top and bottom         • for main contacts       2x (1 10 mm²)         - solid or stranded       2x (1 6 mm²)         - finely stranded with core end processing       2x (1 6 mm²)         - finely stranded without core end processing       2x (1 6 mm²)         - finely stranded without core end processing       2x (1 6 mm²)         • at AWG cables for main contacts       2x (1 8 8)         design of screwdriver shaft       Diameter 3 mm         size of the screwdriver tip       3,0 x 0,5 mm         Safety related data       5 000         proportion of dangerous failures       50 %	
arrangement of electrical connectors for main current circuit       Top and bottom         type of connectable conductor cross-sections       Top and bottom         • for main contacts       2x (1 10 mm²)         — solid or stranded       2x (1 6 mm²)         — finely stranded with core end processing       2x (1 6 mm²)         — finely stranded without core end processing       2x (1 6 mm²)         — finely stranded without core end processing       2x (1 6 mm²)         at AWG cables for main contacts       2x (1 8 8)         design of screwdriver shaft       Diameter 3 mm         size of the screwdriver tip       3,0 x 0,5 mm         Safety related data       50 000         proportion of dangerous failures       50 %         • with high demand rate acc. to SN 31920       50 %	
arrangement of electrical connectors for main current circuit       Top and bottom         type of connectable conductor cross-sections       Top and bottom         • for main contacts       2x (1 10 mm²)         — solid or stranded with core end processing       2x (1 6 mm²)         — finely stranded without core end processing       2x (1 6 mm²)         — finely stranded without core end processing       2x (1 6 mm²)         — finely stranded without core end processing       2x (1 6 mm²)         • at AWG cables for main contacts       2x (1 8 8)         design of screwdriver shaft       Diameter 3 mm         size of the screwdriver tip       3,0 x 0,5 mm         Safety related data       50 00         proportion of dangerous failures       50 %         • with high demand rate acc. to SN 31920       50 %         • with high demand rate acc. to SN 31920       50 %	
arrangement of electrical connectors for main current circuit       Top and bottom         type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>– solid or stranded</li> <li>2x (1 10 mm²)</li> <li>– finely stranded with core end processing</li> <li>2x (1 6 mm²)</li> <li>– finely stranded without core end processing</li> <li>2x (1 6 mm²)</li> <li>– finely stranded without core end processing</li> <li>2x (1 6 mm²)</li> <li>2x (1 8 8)</li> </ul> <li>design of screwdriver shaft</li> <li>Diameter 3 mm</li> <li>size of the screwdriver tip</li> <li>3,0 x 0,5 mm</li> <li>Safety related data</li> <li>B10 value         <ul> <li>with high demand rate acc. to SN 31920</li> <li>50 %</li> <li>with low demand rate acc. to SN 31920</li> <li>50 %</li> <li>failure rate [FIT]             <ul> <li>with low demand rate acc. to SN 31920</li> <li>50 FIT</li> </ul> </li> </ul></li>	
arrangement of electrical connectors for main current circuit       Top and bottom         type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>finely stranded without core end processing</li> <li>at AWG cables for main contacts</li> <li>bize of the screwdriver shaft</li> <li>Diameter 3 mm</li> <li>size of the screwdriver tip</li> <li>3,0 x 0,5 mm</li> </ul> <li>Safety related data</li> <li>B10 value         <ul> <li>with high demand rate acc. to SN 31920</li> <li>50 %</li> <li>with high demand rate acc. to SN 31920</li> <li>50 %</li> <li>with high demand rate acc. to SN 31920</li> <li>50 %</li> <li>with high demand rate acc. to SN 31920</li> <li>50 FIT</li> </ul> </li> <li>T1 value for proof test interval or service life acc. to         <ul> <li>ID y</li> </ul> </li>	
arrangement of electrical connectors for main current circuit       Top and bottom         type of connectable conductor cross-sections       Top and bottom         • for main contacts       2x (1 10 mm²)         - finely stranded with core end processing       2x (1 6 mm²)         - finely stranded without core end processing       2x (1 6 mm²)         - finely stranded without core end processing       2x (1 6 mm²)         - finely stranded without core end processing       2x (1 6 mm²)         • at AWG cables for main contacts       2x (1 8 8)         design of screwdriver shaft       Diameter 3 mm         size of the screwdriver tip       3,0 x 0,5 mm         Safety related data       B10 value         • with high demand rate acc. to SN 31920       50 00         proportion of dangerous failures       50 %         • with high demand rate acc. to SN 31920       50 %         • with high demand rate acc. to SN 31920       50 %         failure rate [FIT]       50 FIT         • with low demand rate acc. to SN 31920       50 FIT         T1 value for proof test interval or service life acc. to       10 y	
arrangement of electrical connectors for main current circuit       Top and bottom         type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>finely stranded without core end processing</li> <li>at AWG cables for main contacts</li> <li>bize of the screwdriver shaft</li> <li>Diameter 3 mm</li> <li>size of the screwdriver tip</li> <li>3,0 x 0,5 mm</li> </ul> <li>Safety related data</li> <li>B10 value         <ul> <li>with high demand rate acc. to SN 31920</li> <li>50 %</li> <li>with high demand rate acc. to SN 31920</li> <li>50 %</li> <li>with high demand rate acc. to SN 31920</li> <li>50 %</li> <li>with high demand rate acc. to SN 31920</li> <li>50 FIT</li> </ul> </li> <li>T1 value for proof test interval or service life acc. to         <ul> <li>ID y</li> </ul> </li>	
arrangement of electrical connectors for main current circuit       Top and bottom         type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>finely stranded without core end processing</li> <li>at AWG cables for main contacts</li> <li>biameter 3 mm</li> <li>size of the screwdriver tip</li> <li>3,0 x 0,5 mm</li> </ul> <li>Safety related data</li> <li>B10 value         <ul> <li>with high demand rate acc. to SN 31920</li> <li>50 000</li> </ul> </li> <li>proportion of dangerous failures         <ul> <li>with low demand rate acc. to SN 31920</li> <li>50 %</li> <li>with high demand rate acc. to SN 31920</li> <li>50 %</li> </ul> </li> <li>failure rate [FIT]         <ul> <li>with low demand rate acc. to SN 31920</li> <li>50 FIT</li> </ul> </li> <li>T1 value for proof test interval or service life acc. to IEC 60529</li> <li>IP20</li>	





General Product A	pproval				For use in hazardous locations	
S.			<u>KC</u>	EHC	IECEx	
For use in hazardous locations	Declaration of Cor	formity	Test Certificates		Marine / Shipping	
ATEX ATEX	CE EG-Konf.	<u>Miscellaneous</u>	<u>Type Test</u> <u>Certificates/Test</u> <u>Report</u>	<u>Special Test</u> <u>Certificate</u>	ABS	
Marine / Shipping						
BUREAU VERITAS	Lloyd's Register urs	PRS	RINA	RMRS RMRS	DNV-GL EMISLEDING	
other		Railway				
<u>Confirmation</u>	UDE VDE	Vibration and Shock	<u>Confirmation</u>			
Further information						
Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2021-1GA20 Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2021-1GA20 Service&Support (Manuals, Certificates, Characteristics, FAQs,) https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-1GA20						
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2021-1GA20⟨=en						
Characteristic: Tripping characteristics, I <sup>2</sup> t, Let-through current						


https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-1GA20/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2021-1GA20&objecttype=14&gridview=view1

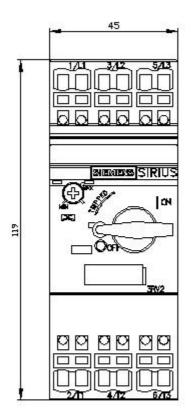

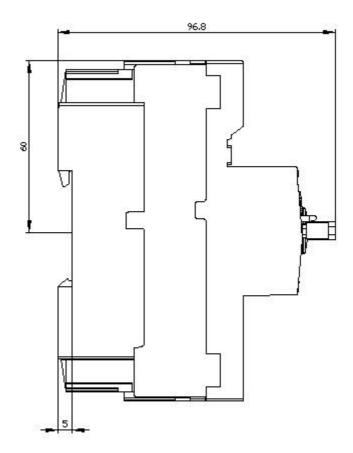

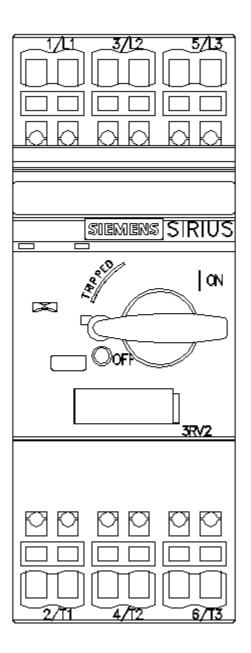

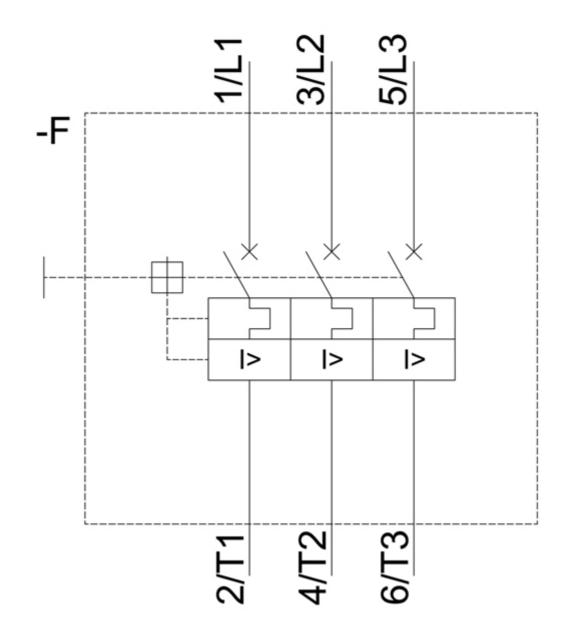

last modified:

12/15/2020 🖸