## SIEMENS

## Data sheet

## 3RV2032-4KA15



Circuit breaker size S2 for motor protection, CLASS 10 A-release 62...73 A N-release 949 A screw terminal increased switching capacity with transverse auxiliary switches 1 NO+1 NC  $\,$ 

product brand name	SIRIUS		
product designation	Circuit breaker		
design of the product	For motor protection		
product type designation	3RV2		
General technical data			
size of the circuit-breaker	S2		
size of contactor can be combined company-specific	S2		
product extension auxiliary switch	Yes		
power loss [W] for rated value of the current			
<ul> <li>at AC in hot operating state</li> </ul>	29.5 W		
at AC in hot operating state per pole	9.8 W		
insulation voltage with degree of pollution 3 at AC rated value	690 V		
surge voltage resistance rated value	6 kV		
maximum permissible voltage for safe isolation in networks with grounded star point			
<ul> <li>between main and auxiliary circuit</li> </ul>	400 V		
<ul> <li>between main and auxiliary circuit</li> </ul>	400 V		
shock resistance acc. to IEC 60068-2-27	25g / 11 ms Sinus		
mechanical service life (switching cycles)			
<ul> <li>of the main contacts typical</li> </ul>	20 000		
<ul> <li>of auxiliary contacts typical</li> </ul>	20 000		
electrical endurance (switching cycles) typical	20 000		
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD		
certificate of suitability according to ATEX directive 2014/34/EU	DMT 02 ATEX F 001		
reference code acc. to IEC 81346-2	Q		
Ambient conditions			
installation altitude at height above sea level maximum	2 000 m		
<ul> <li>ambient temperature during operation</li> </ul>	-20 +60 °C		
<ul> <li>ambient temperature during storage</li> </ul>	-50 +80 °C		
ambient temperature during transport	-50 +80 °C		
temperature compensation	-20 +60 °C		
relative humidity during operation	10 95 %		
Main circuit			
number of poles for main current circuit	3		
adjustable current response value current of the	62 73 A		



ourrent dependent overland related	
current-dependent overload release	
<ul> <li>operating voltage rated value</li> </ul>	690 V
<ul> <li>operating voltage at AC-3 rated value maximum</li> </ul>	690 V
operating frequency rated value	50 60 Hz
operational current rated value	73 A
operational current at AC-3 at 400 V rated value	73 A
operating power at AC-3	
<ul> <li>at 230 V rated value</li> </ul>	22 000 W
<ul> <li>at 400 V rated value</li> </ul>	37 000 W
• at 500 V rated value	45 000 W
<ul> <li>at 690 V rated value</li> </ul>	55 000 W
operating frequency at AC-3 maximum	15 1/h
Auxiliary circuit	
	transverse
design of the auxiliary switch	transverse
number of NC contacts for auxiliary contacts	1
number of NO contacts for auxiliary contacts	1
operational current of auxiliary contacts at AC-15	
• at 24 V	2 A
• at 230 V	0.5 A
operational current of auxiliary contacts at DC-13	
• at 24 V	1 A
• at 60 V	0.15 A
• at 110 V	0 A
• at 125 V	0 A
• at 220 V	0 A
Protective and monitoring functions	
product function	
<ul> <li>ground fault detection</li> </ul>	No
phase failure detection	Yes
trip class	CLASS 10
design of the overload release	thermal
breaking capacity operating short-circuit current (lcs)	thormon and the second s
at AC	
<ul> <li>at 240 V rated value</li> </ul>	100 kA
at 400 V rated value	50 kA
	50 kA 8 kA
• at 400 V rated value	
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul>	8 kA
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul> breaking capacity maximum short-circuit current (Icu)	8 kA
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul>	8 kA 4 kA
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul> breaking capacity maximum short-circuit current (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> </ul>	8 kA 4 kA 100 kA 100 kA
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul> breaking capacity maximum short-circuit current (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> </ul>	8 kA 4 kA 100 kA 100 kA 10 kA
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul> breaking capacity maximum short-circuit current (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> </ul>	8 kA 4 kA 100 kA 100 kA 10 kA 6 kA
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul> breaking capacity maximum short-circuit current (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> </ul>	8 kA 4 kA 100 kA 100 kA 10 kA
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>breaking capacity maximum short-circuit current (Icu)</li> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> </ul>	8 kA 4 kA 100 kA 100 kA 10 kA 6 kA
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>breaking capacity maximum short-circuit current (Icu)</li> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>t AC at 690 V rated value</li> <li>t AC at 690 V rated value</li> <li>t AC at 690 V rated value</li> </ul>	8 kA 4 kA 100 kA 100 kA 10 kA 6 kA
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>breaking capacity maximum short-circuit current (Icu)</li> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>t AC at 690 V rated value</li> </ul>	8 kA 4 kA 100 kA 100 kA 10 kA 6 kA 949 A
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>breaking capacity maximum short-circuit current (Icu)</li> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>t AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> </ul>	8 kA 4 kA 100 kA 100 kA 10 kA 6 kA 949 A 65 A
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>breaking capacity maximum short-circuit current (Icu)</li> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>response value current of instantaneous short-circuit trip unit</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> </ul>	8 kA 4 kA 100 kA 100 kA 10 kA 6 kA 949 A
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>breaking capacity maximum short-circuit current (Icu)</li> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>response value current of instantaneous short-circuit trip unit</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>yielded mechanical performance [hp]</li> </ul>	8 kA 4 kA 100 kA 100 kA 10 kA 6 kA 949 A
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>breaking capacity maximum short-circuit current (Icu)</li> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>for 3-phase AC motor</li> </ul>	8 kA 4 kA 100 kA 100 kA 10 kA 6 kA 949 A 65 A 62 A
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>at 690 V rated value</li> <li>breaking capacity maximum short-circuit current (Icu)</li> <li>at AC at 240 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>response value current of instantaneous short-circuit trip unit</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 200/208 V rated value</li> </ul>	8 kA 4 kA 100 kA 100 kA 10 kA 6 kA 949 A 65 A 62 A 20 hp
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>breaking capacity maximum short-circuit current (Icu)</li> <li>at AC at 240 V rated value</li> <li>at AC at 240 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>response value current of instantaneous short-circuit trip unit</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 200/208 V rated value</li> <li>at 220/230 V rated value</li> </ul> </li> </ul>	8 kA 4 kA 100 kA 100 kA 100 kA 10 kA 6 kA 949 A 65 A 62 A 20 hp 25 hp
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>breaking capacity maximum short-circuit current (Icu)</li> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>response value current of instantaneous short-circuit trip unit</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 480 V rated value</li> <li>at 480 V rated value</li> <li>at 420/208 V rated value</li> <li>at 420/230 V rated value</li> <li>at 460/480 V rated value</li> </ul>	8 kA 4 kA 100 kA 100 kA 100 kA 10 kA 6 kA 949 A 65 A 62 A 20 hp 25 hp 50 hp
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>breaking capacity maximum short-circuit current (Icu)</li> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>response value current of instantaneous short-circuit trip unit</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 200/208 V rated value</li> <li>at 220/230 V rated value</li> <li>at 460/480 V rated value</li> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> </ul> </li> </ul>	8 kA 4 kA 100 kA 100 kA 100 kA 10 kA 6 kA 949 A 65 A 62 A 20 hp 25 hp 50 hp 60 hp
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>breaking capacity maximum short-circuit current (Icu)</li> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 600 V rated value</li> <li>response value current of instantaneous short-circuit trip unit</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 200/208 V rated value</li> <li>at 460/480 V rated value</li> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> </ul> </li> </ul>	8 kA 4 kA 100 kA 100 kA 100 kA 10 kA 6 kA 949 A 65 A 62 A 20 hp 25 hp 50 hp
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>breaking capacity maximum short-circuit current (Icu)</li> <li>at AC at 240 V rated value</li> <li>at AC at 240 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>response value current of instantaneous short-circuit trip unit</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 220/208 V rated value</li> <li>at 460/480 V rated value</li> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> <li>contact rating of auxiliary contacts according to UL</li> </ul> </li> </ul>	8 kA 4 kA 100 kA 100 kA 100 kA 10 kA 6 kA 949 A 65 A 62 A 20 hp 25 hp 50 hp 60 hp
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>breaking capacity maximum short-circuit current (Icu)</li> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 600 V rated value</li> <li>response value current of instantaneous short-circuit trip unit</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 200/208 V rated value</li> <li>at 460/480 V rated value</li> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> </ul> </li> </ul>	8 kA 4 kA 100 kA 100 kA 100 kA 10 kA 6 kA 949 A 65 A 62 A 20 hp 25 hp 50 hp 60 hp
<ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>breaking capacity maximum short-circuit current (Icu)</li> <li>at AC at 240 V rated value</li> <li>at AC at 240 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>response value current of instantaneous short-circuit trip unit</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 220/208 V rated value</li> <li>at 460/480 V rated value</li> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> <li>contact rating of auxiliary contacts according to UL</li> </ul> </li> </ul>	8 kA 4 kA 100 kA 100 kA 100 kA 10 kA 6 kA 949 A 65 A 62 A 20 hp 25 hp 50 hp 60 hp C300 / R300



design of the fuse link	
<ul> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	fuse gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A)
design of the fuse link for IT network for short-circuit protection of the main circuit	
• at 240 V	none required
• at 400 V	160
● at 500 V	125
• at 690 V	100
nstallation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail
	according to DIN EN 60715
height	140 mm
width	55 mm
depth	149 mm
required spacing	
<ul> <li>for grounded parts at 400 V</li> </ul>	
— downwards	50 mm
— upwards	50 mm
— at the side	10 mm
• for live parts at 400 V	
— downwards	50 mm
— upwards	50 mm
— at the side	10 mm
<ul> <li>for grounded parts at 500 V</li> </ul>	10 1111
- downwards	50 mm
	50 mm
— upwards	
— at the side	10 mm
• for live parts at 500 V	50 mm
— downwards	50 mm
— upwards	50 mm
— at the side	10 mm
<ul> <li>for grounded parts at 690 V</li> </ul>	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	10 mm
— forwards	0 mm
<ul> <li>for live parts at 690 V</li> </ul>	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	10 mm
— forwards	0 mm
Connections/ Terminals	
product function removable terminal for auxiliary and control circuit	No
type of electrical connection	
for main current circuit	screw-type terminals
<ul> <li>for auxiliary and control circuit</li> </ul>	screw-type terminals
arrangement of electrical connectors for main current circuit	Top and bottom
type of connectable conductor cross-sections	
for main contacts	
— solid or stranded	2x (1 35 mm²), 1x (1 50 mm²)
<ul> <li>— finely stranded with core end processing</li> </ul>	2x (1 25 mm²), 1x (1 35 mm²)
	2x (18 2), 1x (18 1)
<ul> <li>at AWG cables for main contacts</li> </ul>	



<ul> <li>for auxiliary con</li> </ul>	ntacts					
— solid or stranded			2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²)			
- finely stranded with core end processing			2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> )			
	for auxiliary contacts	•	x (20 16), 2x (18 14)	,		
<ul> <li>tightening torqu terminals</li> </ul>	ue for main contacts with screw-type		3 4.5 N·m			
<ul> <li>tightening torque for auxiliary contacts with screw- type terminals</li> </ul>		with screw- 0.	0.8 1.2 N·m			
design of screwdriver shaft		Di	iameter 5 to 6 mm			
size of the screwdriver tip		P	ozidriv 2			
design of the thread	d of the connection sci	rew				
for main contacts		Μ	6			
<ul> <li>of the auxiliary and control contacts</li> </ul>		Μ	3			
Safety related data						
B10 value						
	and rate acc. to SN 3192	20 5	000			
proportion of dange		.0	000			
	nd rate acc. to SN 31920	5	D %			
		-				
	and rate acc. to SN 3192	50	0 %			
failure rate [FIT]						
	nd rate acc. to SN 31920		) FIT			
IEC 61508	est interval or service		0 у			
	on the front acc. to IEC		20			
	the front acc. to IEC 6		nger-safe, for vertical conta	ct from the front		
display version for sw	vitching status	H	andle			
Certificates/ approva	ls					
					For use in	
General Product A	oproval				hazardous locations	
General Product A		(U) u	KC	EAC		
General Product Ap	oproval	ormity	KC Test Certificates	EAC	locations	
For use in hazardous	CCC	ormity EG-Konf.		ERC Special Test Certificate	locations	
For use in hazardous	CCC	CE	Test Certificates		Iocations	
For use in hazardous locations	CCC	CE EG-Konf.	Test Certificates		Iocations	
For use in hazardous locations	Ccc Declaration of Conf Miscellaneous	CE EG-Konf.	Test Certificates Type Test Certificates/Test Report g	Certificate	Iocations	







**Confirmation** 



**Confirmation** 

Railway

Vibration and Shock

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2032-4KA15

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2032-4KA15

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2032-4KA15

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2032-4KA15&lang=en


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2032-4KA15/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2032-4KA15&objecttype=14&gridview=view1



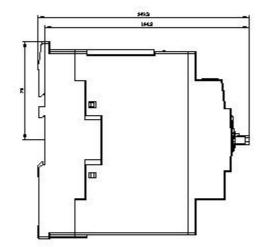



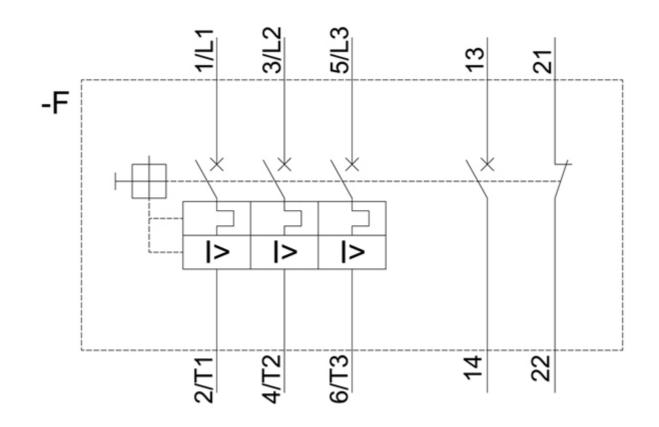

last modified:

12/15/2020 🖸