



Circuit breaker size S00 for motor protection, CLASS 10 A-release 1.1...1.6 A N-release 21 A ring cable lug connection Standard switching capacity

|  |                      |
|--|----------------------|
| <b>product brand name</b>  | SIRIUS               |
| <b>product designation</b>   | Circuit breaker      |
| <b>design of the product</b>   | For motor protection |
| <b>product type designation</b>  | 3RV2                 |
| <b>General technical data</b>  |                      |
| <b>size of the circuit-breaker</b>   | S00                  |
| <b>size of contactor can be combined company-specific</b>                                  | S00, S0              |
| product extension auxiliary switch   | Yes                  |
| <b>power loss [W] for rated value of the current</b>                                       |                      |
| • at AC in hot operating state   | 7.25 W               |
| • at AC in hot operating state per pole  | 2.4 W                |
| insulation voltage with degree of pollution 3 at AC rated value                            | 690 V                |
| <b>surge voltage resistance rated value</b>  | 6 kV                 |
| <b>maximum permissible voltage for safe isolation in networks with grounded star point</b> |                      |
| • between main and auxiliary circuit   | 400 V                |
| • between main and auxiliary circuit   | 400 V                |
| shock resistance acc. to IEC 60068-2-27  | 25g / 11 ms          |
| <b>mechanical service life (switching cycles)</b>  |                      |
| • of the main contacts typical   | 100 000              |
| • of auxiliary contacts typical  | 100 000              |
| electrical endurance (switching cycles) typical  | 100 000              |
| <b>type of protection according to ATEX directive 2014/34/EU</b>                           | Ex II (2) GD         |
| certificate of suitability according to ATEX directive 2014/34/EU                          | DMT 02 ATEX F 001    |
| <b>reference code acc. to IEC 81346-2</b>  | Q                    |
| <b>Ambient conditions</b>  |                      |
| installation altitude at height above sea level maximum                                    | 2 000 m              |
| • ambient temperature during operation   | -20 ... +60 °C       |
| • ambient temperature during storage   | -50 ... +80 °C       |
| • ambient temperature during transport   | -50 ... +80 °C       |
| <b>temperature compensation</b>  | -20 ... +60 °C       |
| relative humidity during operation   | 10 ... 95 %          |
| <b>Main circuit</b>  |                      |
| <b>number of poles for main current circuit</b>  | 3                    |
| <b>adjustable current response value current of the</b>                                    | 1.1 ... 1.6 A        |

|   |  |
|---|--|
| <b>current-dependent overload release</b>   |  |
| <ul style="list-style-type: none"> <li>operating voltage rated value</li> <li>operating voltage at AC-3 rated value maximum</li> </ul>  | 690 V<br>690 V   |
| <b>operating frequency rated value</b>  | 50 ... 60 Hz   |
| <b>operational current rated value</b>  | 1.6 A  |
| operational current at AC-3 at 400 V rated value  | 1.6 A  |
| operating power at AC-3   |  |
| <ul style="list-style-type: none"> <li>at 230 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul>  | 250 W<br>550 W<br>750 W<br>1 100 W   |
| operating frequency at AC-3 maximum   | 15 1/h   |
| <b>Auxiliary circuit</b>  |  |
| <b>number of NC contacts for auxiliary contacts</b>   | 0  |
| <b>number of NO contacts for auxiliary contacts</b>   | 0  |
| number of CO contacts for auxiliary contacts  | 0  |
| <b>Protective and monitoring functions</b>  |  |
| <b>product function</b>   |  |
| <ul style="list-style-type: none"> <li>ground fault detection</li> <li>phase failure detection</li> </ul>   | No<br>Yes  |
| <b>trip class</b>   | CLASS 10   |
| <b>design of the overload release</b>   | thermal  |
| <b>breaking capacity operating short-circuit current (Ics) at AC</b>  |  |
| <ul style="list-style-type: none"> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul>  | 100 kA<br>100 kA<br>100 kA<br>100 kA   |
| <b>breaking capacity maximum short-circuit current (Icu)</b>  |  |
| <ul style="list-style-type: none"> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> </ul>  | 100 kA<br>100 kA<br>100 kA<br>100 kA   |
| response value current of instantaneous short-circuit trip unit   | 21 A   |
| <b>UL/CSA ratings</b>   |  |
| <b>full-load current (FLA) for 3-phase AC motor</b>   |  |
| <ul style="list-style-type: none"> <li>at 480 V rated value</li> <li>at 600 V rated value</li> </ul>  | 1.6 A<br>1.6 A   |
| <b>yielded mechanical performance [hp]</b>  |  |
| <ul style="list-style-type: none"> <li>for single-phase AC motor <ul style="list-style-type: none"> <li>at 230 V rated value</li> </ul> </li> <li>for 3-phase AC motor <ul style="list-style-type: none"> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> </ul> </li> </ul> | 0.1 hp<br>0.75 hp<br>0.75 hp   |
| <b>Short-circuit protection</b>   |  |
| <b>product function short circuit protection</b>  | Yes  |
| <b>design of the short-circuit trip</b>   | magnetic   |
| <b>design of the fuse link for IT network for short-circuit protection of the main circuit</b>  |  |
| <ul style="list-style-type: none"> <li>at 500 V</li> <li>at 690 V</li> </ul>  | gL/gG 20 A<br>gL/gG 16 A   |
| <b>Installation/ mounting/ dimensions</b>   |  |
| <b>mounting position</b>  | any  |
| <b>fastening method</b>   | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 |
| <b>height</b>   | 97 mm  |
| <b>width</b>  | 45 mm  |

|  |                       |
|--|-----------------------|
| <b>depth</b>   | 97 mm                 |
| <b>required spacing</b>  |                       |
| <ul style="list-style-type: none"> <li>● for grounded parts at 400 V <ul style="list-style-type: none"> <li>— downwards 30 mm</li> <li>— upwards 30 mm</li> <li>— at the side 9 mm</li> </ul> </li> <li>● for live parts at 400 V <ul style="list-style-type: none"> <li>— downwards 30 mm</li> <li>— upwards 30 mm</li> <li>— at the side 9 mm</li> </ul> </li> <li>● for grounded parts at 500 V <ul style="list-style-type: none"> <li>— downwards 30 mm</li> <li>— upwards 30 mm</li> <li>— at the side 9 mm</li> </ul> </li> <li>● for live parts at 500 V <ul style="list-style-type: none"> <li>— downwards 30 mm</li> <li>— upwards 30 mm</li> <li>— at the side 9 mm</li> </ul> </li> <li>● for grounded parts at 690 V <ul style="list-style-type: none"> <li>— downwards 50 mm</li> <li>— upwards 50 mm</li> <li>— backwards 0 mm</li> <li>— at the side 30 mm</li> <li>— forwards 0 mm</li> </ul> </li> <li>● for live parts at 690 V <ul style="list-style-type: none"> <li>— downwards 50 mm</li> <li>— upwards 50 mm</li> <li>— backwards 0 mm</li> <li>— at the side 30 mm</li> <li>— forwards 0 mm</li> </ul> </li> </ul> |                       |
| <b>Connections/ Terminals</b>  |                       |
| product function removable terminal for auxiliary and control circuit  | No                    |
| <b>type of electrical connection</b>   |                       |
| <ul style="list-style-type: none"> <li>● for main current circuit Ring cable lug connection</li> <li>● for auxiliary and control circuit ring cable connection</li> </ul>  |                       |
| <b>arrangement of electrical connectors for main current circuit</b>   | Top and bottom        |
| <b>tightening torque</b>   |                       |
| <ul style="list-style-type: none"> <li>— for main contacts for ring cable lug 0.8 ... 1.2 N·m</li> <li>— for auxiliary contacts for ring cable lug 1.2 ... 0.8 N·m</li> </ul>  |                       |
| <b>outer diameter of the usable ring cable lug maximum</b>   | 7.5 mm                |
| <b>design of screwdriver shaft</b>   | Diameter 5 to 6 mm    |
| <b>size of the screwdriver tip</b>   | Size 2 and Pozidriv 2 |
| <b>design of the thread of the connection screw</b>  |                       |
| <ul style="list-style-type: none"> <li>● for main contacts M3</li> <li>● of the auxiliary and control contacts M3</li> </ul>   |                       |
| <b>Safety related data</b>   |                       |
| <b>B10 value</b>   |                       |
| <ul style="list-style-type: none"> <li>● with high demand rate acc. to SN 31920 5 000</li> </ul>   |                       |
| <b>proportion of dangerous failures</b>  |                       |
| <ul style="list-style-type: none"> <li>● with low demand rate acc. to SN 31920 50 %</li> <li>● with high demand rate acc. to SN 31920 50 %</li> </ul>  |                       |
| <b>failure rate [FIT]</b>  |                       |
| <ul style="list-style-type: none"> <li>● with low demand rate acc. to SN 31920 50 FIT</li> </ul>   |                       |
| <b>T1 value for proof test interval or service life acc. to IEC 61508</b>  | 10 y                  |
| <b>protection class IP on the front acc. to IEC 60529</b>  | IP00                  |

## Certificates/ approvals

## General Product Approval

## For use in hazardous locations



## Declaration of Conformity

## Test Certificates

## Marine / Shipping

[Miscellaneous](#)


EG-Konf.

[Type Test Certificates/Test Report](#)
[Special Test Certificate](#)


ABS

BUREAU  
VERITAS

## Marine / Shipping

## other



LRS



PRS



RINA



RMRS



DNV-GL

[Confirmation](#)

## other

## Railway



VDE

[Confirmation](#)
[Vibration and Shock](#)

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3RV2011-1AA40>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RV2011-1AA40>

Service&amp;Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1AA40>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mfb=3RV2011-1AA40&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RV2011-1AA40&lang=en)
Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current
<https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1AA40/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mfb=3RV2011-1AA40&objecttype=14&gridview=view1>

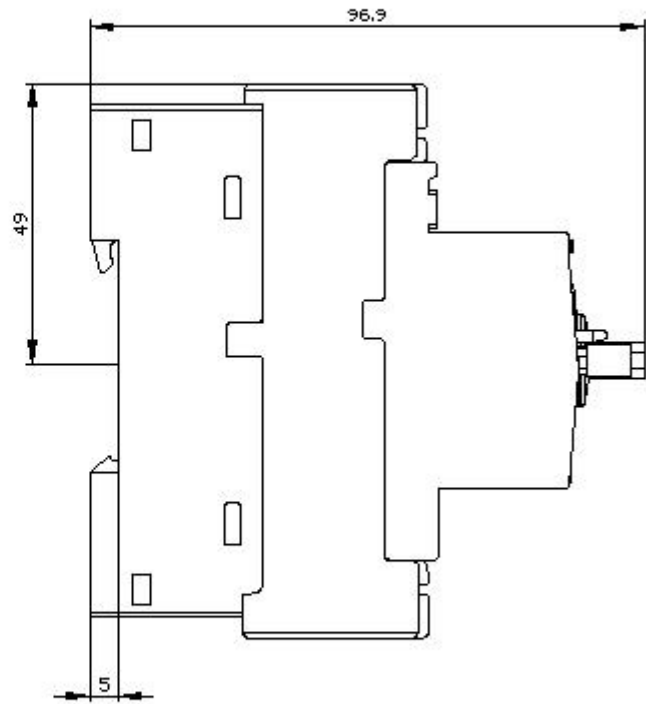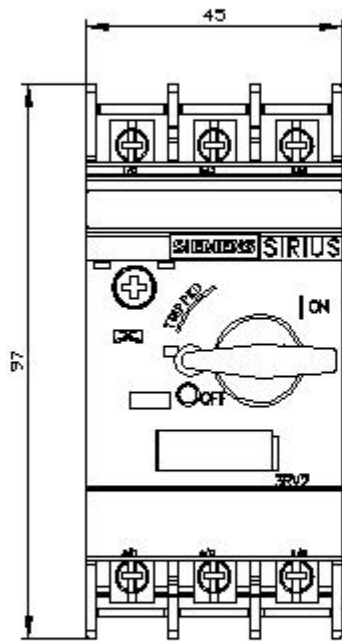

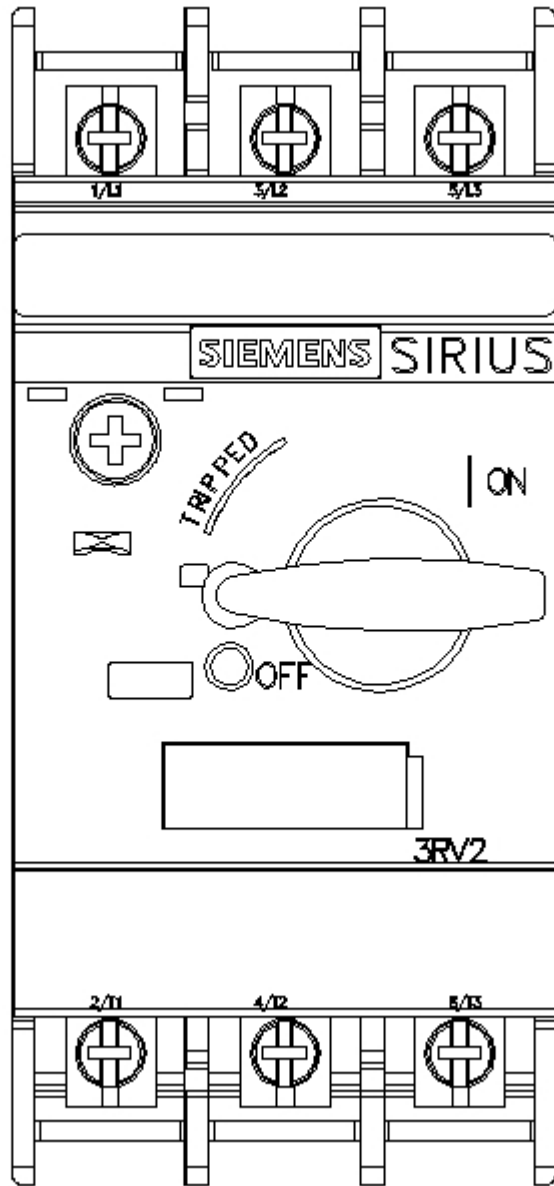



last modified:

12/9/2020 