

SIPLUS S7-300 FM350-2 8 channels for medial exposure with conformal coating based on 6ES7350-2AH01-0AE0 . Counter module FM 350-2, 8 channels, 20 kHz, 24 V encoder for counting, frequency measurement, speed measurement, period duration measurement, dosing incl. configuration package and Electronic documentation on CD-ROM

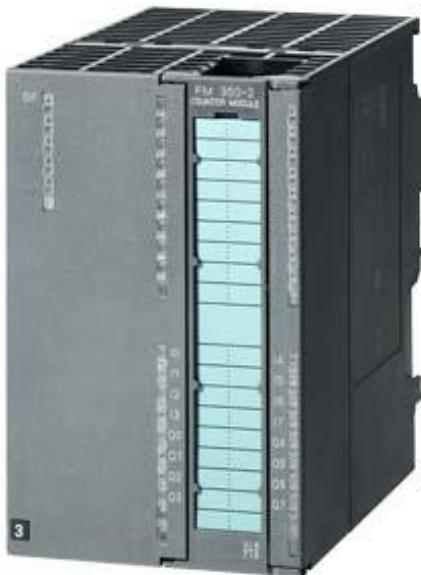


Figure similar

### Supply voltage

Auxiliary voltage 1L+, load voltage 2L+

• Rated value (DC)	24 V
• permissible range, lower limit (DC)	20.4 V
• permissible range, upper limit (DC)	28.8 V

### Input current

from load voltage L+ (without load), max.	150 mA
from backplane bus 5 V DC, max.	100 mA

### Encoder supply

NAMUR encoder supply

• 8.2 V	Yes
• Output current, max.	200 mA

### Power loss

Power loss, typ.	10 W
------------------	------

### Digital inputs

Number of digital inputs	8
Number of NAMUR inputs	8
Functions	1 each for gate start/ gate stop
<b>Input voltage</b>	
• for signal "0"	-3 to +5V
• for signal "1"	11 to 30.2 V
<b>Input current</b>	
• for signal "0", max. (permissible quiescent current)	2 mA
• for signal "1", typ.	9 mA
<b>Input delay (for rated value of input voltage)</b>	
for standard inputs	
— at "0" to "1", max.	50 µs
<b>Cable length</b>	
• shielded, max.	100 m
<b>Digital outputs</b>	
Number of digital outputs	8
Short-circuit protection	Yes
Limitation of inductive shutdown voltage to	L+ (-40 V)
<b>Output voltage</b>	
• for signal "1", min.	L+ (-0.8 V)
<b>Output current</b>	
• for signal "1" rated value	0.5 A
• for signal "0" residual current, max.	0.5 mA
<b>Output delay with resistive load</b>	
• "0" to "1", max.	300 µs
<b>Switching frequency</b>	
• with resistive load, max.	500 Hz
• with inductive load, max.	0.5 Hz
<b>Total current of the outputs (per group)</b>	
horizontal installation	
— up to 40 °C, max.	4 A
— up to 60 °C, max.	2 A
all other mounting positions	
— up to 40 °C, max.	2 A
<b>Cable length</b>	
• shielded, max.	600 m
• unshielded, max.	100 m
<b>Encoder</b>	
Connectable encoders	
• Incremental encoder (asymmetrical)	Yes

• 24 V initiator	Yes
• 24 V directional element	Yes
• NAMUR encoder	Yes
• 2-wire sensor	Yes
<b>NAMUR encoder</b>	
• Input signal	to DIN 19 234
• Input current for signal "0", max.	1.2 mA
• Input current for signal "1", min.	2.1 mA
• Input delay, max.	50 µs
• Input frequency, max.	20 kHz
• Cable length, shielded, max.	100 m
<b>Interrupts/diagnostics/status information</b>	
Diagnostics function	Yes; Diagnostic information readable
<b>Alarms</b>	
• Diagnostic alarm	Yes; Parameterizable
• Hardware interrupt	Yes; Parameterizable
<b>Diagnostics indication LED</b>	
• Group error SF (red)	Yes
<b>Counter</b>	
Number of counter inputs	8; 32 bit or ±31 bit
<b>Counter input 24 V</b>	
• Input voltage for signal "0"	-3 to +5V
• Input voltage for signal "1"	11 to 30.2 V
• Input current for signal "1", typ.	9 mA
• Counting frequency, max.	20 kHz; Incremental encoder: 10 kHz
<b>Potential separation</b>	
<b>Potential separation digital inputs</b>	
• between the channels and backplane bus	Yes; and shielding
<b>Potential separation digital outputs</b>	
• between the channels and backplane bus	Yes; and shielding
<b>Potential separation counter</b>	
• between the channels and backplane bus	Yes; and shielding
<b>Standards, approvals, certificates</b>	
CE mark	Yes
UL approval	Yes; File E239877
RCM (formerly C-TICK)	Yes
KC approval	Yes
EAC (formerly Gost-R)	Yes
<b>Ambient conditions</b>	
Ambient temperature during operation	

• min.	0 °C; = Tmin
• max.	60 °C; = Tmax
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
<b>Relative humidity</b>	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
<b>Resistance</b>	
<b>Use in stationary industrial systems</b>	
— to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
— to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
— to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
<b>Use on ships/at sea</b>	
— to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
— to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
— to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
<b>Usage in industrial process technology</b>	
— Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
— Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>	
— Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Connection method</b>	
required front connector	1x 40-pin
<b>Dimensions</b>	
Width	80 mm
Height	125 mm
Depth	120 mm
<b>Weights</b>	

Weight, approx.

460 g

last modified:

10/13/2020