


FRONT CONNECTOR CPU 313C/314C SCREW
 Front connector module with flat ribbon Cable connection for compact CPU 313C/314C-2PTP/314C-2DP for connection X1 Power supply over Screw terminals

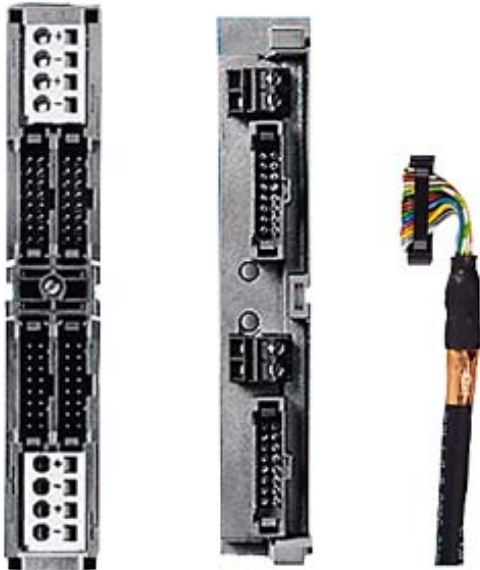

target system	SIMATIC S7-300
suitability for use	Compact CPU 313 / 314
Product type designation	Fully modular connection
Product designation	Front connector module

Operating data	
Operating voltage	
• at DC / Rated value	24 V
• rated value	60 V
• at DC / maximum	60 V
Current / rated value	1 A
Continuous current / at DC / per plug-in contact / maximum	1 A
Total current / maximum	4 A
Operating temperature	0 ... 60 °C
Ambient temperature	
• during operation	0 ... 60 °C
• during storage	-40 ... +70 °C
number of poles	40; of the front connector

Manufacturer's article number / of device connector / usable	replacement for S7-300 40 pole
number of the plug contacts / of the electrical connection	3
Type of electrical connection / for connecting cable	Plug-in connection
Number of poles / at the 1st interface	16; the IDC connector for the connection cable
Position / of the terminal	at the top
Type of electrical connection / for power supply	Screw-type terminal
Number of terminals	4; 2 x 1 x L+, 2 x 1 x M
Width of screwdriver blade	3.5 mm
Tightening torque / with screw-type terminals	0.4 ... 0.7 N·m
Product component / required / connection plate	No
Number of cables / per connection	2; Connection for internal system: Combination of 1 or 2 Wires until the sum total of cross sections be achieved in a ferrule.
Wire stripping length	6 mm
type of connectable conductor cross-sections / solid	No
<ul style="list-style-type: none"> • Connectable conductor cross-section / for flexible conductor / with core end processing • Connectable conductor cross-section / stranded • connectable conductor cross-section / finely stranded / without core end processing • connectable conductor cross-section / finely stranded / with core end processing 	0.25 ... 0.75 mm ² ; End sleeve according to DIN 46228 without plastic collar 0.25 ... 1.5 mm ² 0.25 ... 0.75 mm ² 0.25 ... 0.75 mm ²
Type of wire end sleeve	
<ul style="list-style-type: none"> • without plastic sleeve / acc. to DIN 46228-1 	Length 5mm to 7mm
Outer diameter / of the wire insulation	2 mm; to the connection of the supply terminal
Wire length / maximum	30 m; between front connector module and terminal module

General data

Mounting type	direct mounting
Degree of pollution	2
overvoltage category	2
Design tested acc. to type of protection / EEx e	No
Certificate of suitability / cULus approval	Yes
Reference code / acc. to DIN EN 81346-2	X
Material / of the insulating body	other
Color / of the enclosure	black
Product feature / transparent	No
net weight	0.084 kg

last modified: 07/20/2020