


accessories circuit breaker 3WL signal switch for 1st and 2nd aux. release



Model				
product brand name	SETRON			
product designation	Signaling switch			
design of the product	Accessories			
General technical data				
degree of pollution	3			
Voltage				
surge voltage resistance / rated value	4 kV			
Supply voltage				
operating voltage				
• at AC / at 50 Hz / rated value / maximum	250 V			
• at DC / rated value / maximum	250 V			
Current				
operational current				
• at AC-12 / at 230 V / rated value	8 A			
• at DC-12 / at 230 V / rated value	0.2 A			
• at DC-12 / at 110 V / rated value	0.4 A			
• at DC-12 / at 24 V / rated value	6 A			
Short circuit				
design of the DIAZED fuse link gG / for short-circuit protection / maximum permissible	6 A Dz (quick)			
General Product Approval	EMC	Declaration of Conformity	Test Certificates	other

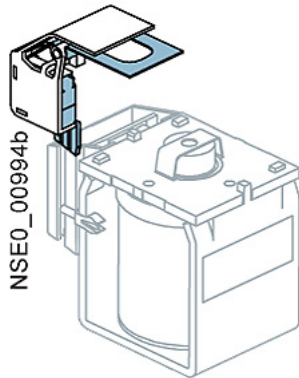

[Miscellaneous](#)

[Environmental Conformations](#)

[Manufacturer Declaration](#)

other

[Miscellaneous](#)

## Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3WL9111-0AH02-0AA0>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3WL9111-0AH02-0AA0>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mfb=3WL9111-0AH02-0AA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=3WL9111-0AH02-0AA0)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

