



circuit breaker 3VA1 IEC frame 630 breaking capacity class S Icu=36kA @ 415V 3-pole, line protection TM240, ATAM, In=630A overload protection Ir=440A...630A short-circuit protection Ii=4...8 x In nut keeper kit



| Model | |
|--|-----------------------------|
| product brand name | SETRON |
| product designation | Molded case circuit breaker |
| Product version | Line protection |
| design of the overcurrent release | TM240 |
| protection function of the overcurrent release | LI |
| number of poles | 3 |
| General technical data | |
| Tension assignée d'isolement Ui | 800 V |
| Max. rated operational voltage Ue with AC 50/60Hz | 690 V |
| Max. rated operational voltage Ue with DC | 500 V |
| power loss [W] / maximum | 192.9 W |
| Active power loss / for rated value of the current / at AC / in hot operating state / per pole | 64.3 W |
| mechanical service life (switching cycles) / typical | 15 000 |
| Electrical endurance (switching cycles) / at AC-1 / at 380/415 V 50/60 Hz | 4 000 |
| Electrical endurance (switching cycles) / at AC-1 / at 690 V 50/60 Hz | 2 700 |
| Neutral conductors / upgradeable/retrofitable | No |
| ground-fault monitoring version | Without |
| product function | |
| • communication function | No |
| • other measurement function | No |
| net weight | 3.9 kg |
| Current | |
| Max. rated operational current of the frame size | 630 A |
| Courant permanent assigné Iu | 630 A |
| operational current | |
| • at 40 °C | 630 A |
| • at 45 °C | 630 A |
| • at 50 °C | 630 A |
| • at 55 °C | 618 A |
| • at 60 °C | 607 A |
| • at 65 °C | 595 A |
| • at 70 °C | 583 A |
| Switching capacity according to IEC 60947 | |
| switching capacity class of the circuit breaker | S |

| | |
|--|--|
| breaking capacity maximum short-circuit current (I _{cu}) | |
| <ul style="list-style-type: none"> • at 240 V • at 415 V • at 440 V • at 500 V • at 690 V | 55 kA 36 kA 36 kA 25 kA 7 kA |
| breaking capacity operating short-circuit current (I _{cs}) | |
| <ul style="list-style-type: none"> • at 240 V • at 415 V • at 440 V • at 500 V • at 690 V | 55 kA 36 kA 36 kA 25 kA 5 kA |
| short-circuit current making capacity (I _{cm}) | |
| <ul style="list-style-type: none"> • at 240 V • at 415 V • at 440 V • at 500 V • at 690 V | 121 kA 76 kA 76 kA 53 kA 10.5 kA |
| design of short-circuit protection | For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the last chapter |
| Adjustable parameters | |
| Adjustable response value current / I _g min. | 441 A |
| Adjustable response value current / I _g min. | 630 A |
| Adjustable response value current / I _i min. | 3 150 A |
| Adjustable response value current / I _i max. | 5 040 A |
| Ground fault protection / tripping switchable / I _{2t} =ON/OFF | No |
| Mechanical Design | |
| height [in] | 9.8 in |
| Height | 248 mm |
| width [in] | 5.4 in |
| Width | 138 mm |
| depth [in] | 4.3 in |
| depth | 110 mm |
| Connections | |
| arrangement of electrical connectors / for main current circuit | Front terminal |
| Auxiliary circuit | |
| number of CO contacts / for auxiliary contacts | 0 |
| Accessories | |
| product extension / optional / motor drive | Yes |
| Environmental conditions | |
| protection class IP / on the front | IP40 |
| ambient temperature | |
| <ul style="list-style-type: none"> • during operation / minimum • during operation / maximum • during storage / minimum • during storage / maximum | -25 °C 70 °C -40 °C 80 °C |
| Certificates | |
| reference code / acc. to IEC 81346-2 | Q |
| General Product Approval | EMC |



Miscellaneous



| Declaration of Conformity | Test Certificates | | | Shipping Approval | other |
|---|-------------------------------|--|-------------------------------|--|--|
|  EG-Konf. | Miscellaneous | Type Test Certificates/Test Report | Miscellaneous |  LRS | Manufacturer Declaration |

other

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA1463-4EF32-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)





<https://support.industry.siemens.com/cs/ww/en/ps/3VA1463-4EF32-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA1463-4EF32-0AA0

Tender specifications

<http://www.siemens.com/specifications>

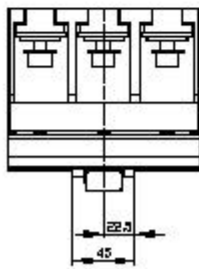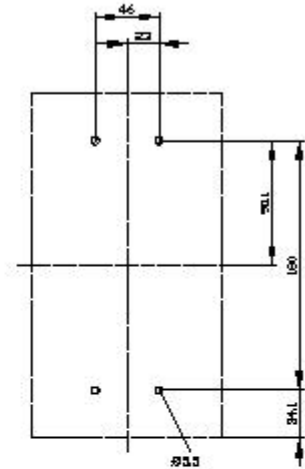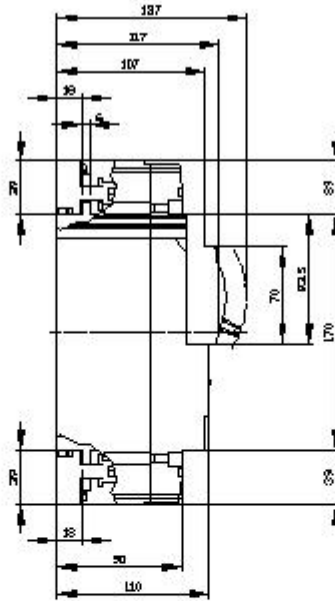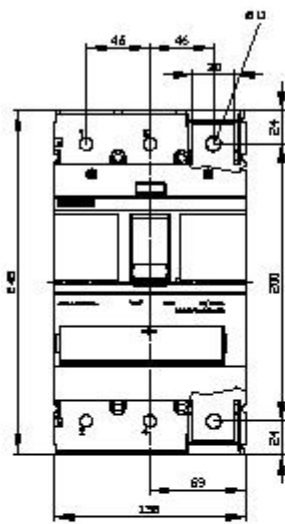



last modified:

12/1/2020 