







synchronizable motor operator 24V DC incl. COM accessory for: 3VA2 100/160/250

Model	
product brand name	SETRON
product designation	Accessories
Product version	Motorized operating mechanism with stored energy mechanism (SEO)
General technical data	
Voltage	
Type de tension pour la commande	DC
Rated operational power	300 V·A
Current	
Mechanical Design	
Rated control supply voltage U_s with DC	24 V
Height	118.7 mm
Width	104.6 mm
depth	162.8 mm
connectable conductor cross-section / solid	
• minimum	1.5 mm ²
• maximum	1.5 mm ²
connectable conductor cross-section / finely stranded / with core end processing	
• minimum	1.5 mm ²
• maximum	1.5 mm ²
connectable conductor cross-section / stranded	
• minimum	1.5 mm ²
• maximum	1.5 mm ²
ambient temperature / during operation	
• minimum	-25 °C
• maximum	70 °C
ambient temperature / during storage	
• minimum	-40 ... +80
• maximum	
tightening torque	
• minimum	0.18 N·m
• maximum	0.22 N·m
Connections according IEC	
stripped length	6 mm
Connections according UL	
Certificates	

General Product Approval	EMC	Declaration of Conformity	Shipping Approval	other	
Miscellaneous		 RCM	 EG-Konf.	 LRS	Manufacturer Declaration

other
Miscellaneous

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9267-0HC15>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/ww/en/ps/3VA9267-0HC15>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9267-0HC15

Tender specifications

<http://www.siemens.com/specifications>

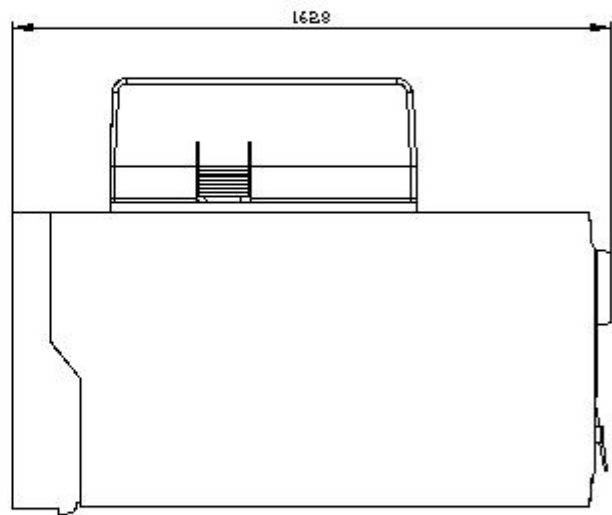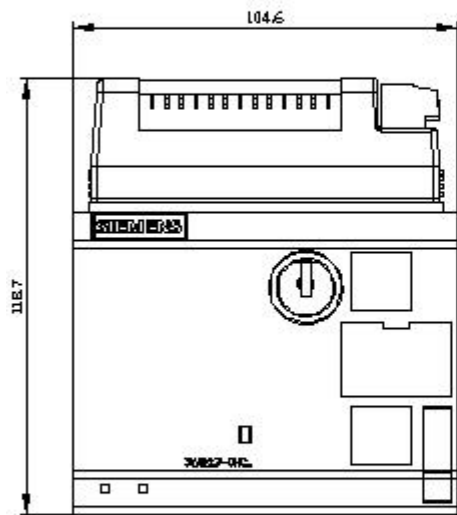

last modified:

12/19/2020 