



synchronizable motor operator 110-230V AC/110-250V DC accessory for:  
3VA2 100/160/250

Model	
product brand name	SENTRON
product designation	Accessories
Product version	Motorized operating mechanism with stored energy mechanism (SEO)
General technical data	
Voltage	
Type de tension pour la commande	AC/DC
<ul style="list-style-type: none"> <li>Rated control supply voltage <math>U_s</math> at AC 50 Hz</li> </ul>	110 V
<ul style="list-style-type: none"> <li>Rated control supply voltage <math>U_s</math> at AC 50 Hz</li> </ul>	230 V
<ul style="list-style-type: none"> <li>Rated control supply voltage <math>U_s</math> at AC 60 Hz</li> </ul>	110 V
<ul style="list-style-type: none"> <li>Rated control supply voltage <math>U_s</math> at AC 60 Hz</li> </ul>	230 V
Rated operational power	300 V·A
Current	
Mechanical Design	
Rated control supply voltage $U_s$ with DC	110 V
Height	118.7 mm
Width	104.6 mm
depth	162.8 mm
connectable conductor cross-section / solid	
<ul style="list-style-type: none"> <li>minimum</li> </ul>	1.5 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>maximum</li> </ul>	2.5 mm <sup>2</sup>
connectable conductor cross-section / finely stranded / with core end processing	
<ul style="list-style-type: none"> <li>minimum</li> </ul>	1.5 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>maximum</li> </ul>	2.5 mm <sup>2</sup>
connectable conductor cross-section / stranded	
<ul style="list-style-type: none"> <li>minimum</li> </ul>	1.5 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>maximum</li> </ul>	2.5 mm <sup>2</sup>
ambient temperature / during operation	
<ul style="list-style-type: none"> <li>minimum</li> </ul>	-25 °C
<ul style="list-style-type: none"> <li>maximum</li> </ul>	70 °C
ambient temperature / during storage	
<ul style="list-style-type: none"> <li>minimum</li> </ul>	-40 ... +80
<ul style="list-style-type: none"> <li>maximum</li> </ul>	
tightening torque	
<ul style="list-style-type: none"> <li>minimum</li> </ul>	0.36 N·m
<ul style="list-style-type: none"> <li>maximum</li> </ul>	0.44 N·m





## Connections according IEC

stripped length

7 mm

## Connections according UL

## Certificates

General Product Approval	EMC	Declaration of Conformity	Shipping Approval	other	
<a href="#">Miscellaneous</a>		 RCM	 EG-Konf.	 LRS	<a href="#">Manufacturer Declaration</a>

other

[Miscellaneous](#)

## Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9267-0HC30>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**



<https://support.industry.siemens.com/cs/ww/en/ps/3VA9267-0HC30>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9267-0HC30](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9267-0HC30)

**Tender specifications**

<http://www.siemens.com/specifications>

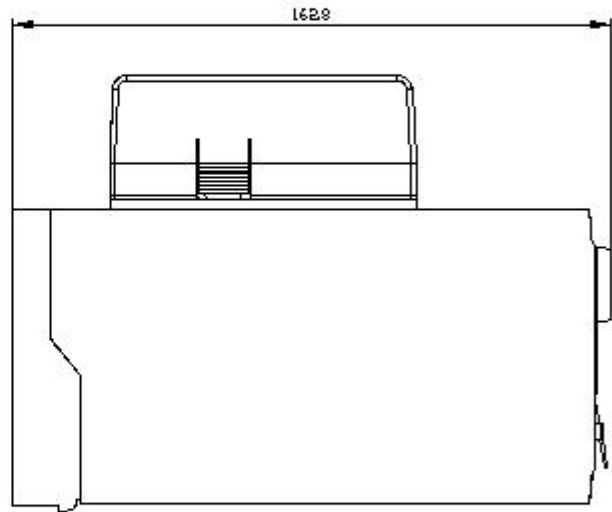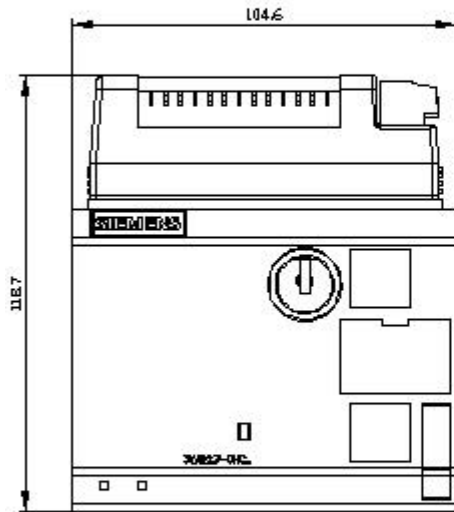

last modified:

11/20/2020 