

RCI484T30**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

Similar to illustration

Individual relays within the RIDERSERIES RCI

- 2 CO contacts
- AC coils
- With integrated status LED and test button

General ordering data

| | |
|------------|--|
| Version | RIDERSERIES RCI, Relay, Number of contacts: 2, CO contact AgNi, Rated control voltage: 230 V AC, Continuous current: 8 A, Plug-in connection, Test button available: Yes |
| Order No. | 8870370000 |
| Type | RCI484T30 |
| GTIN (EAN) | 4032248613755 |
| Qty. | 10 pc(s). |

Creation date February 26, 2022 10:26:48 AM CET

Catalogue status 11.02.2022 / We reserve the right to make technical changes.

RCI484T30

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|------------|---------|-----------------|------------|
| Depth | 26.7 mm | Depth (inches) | 1.051 inch |
| Height | 29 mm | Height (inches) | 1.142 inch |
| Width | 13 mm | Width (inches) | 0.512 inch |
| Net weight | 14.02 g | | |

Temperatures

| | | | |
|---------------------|--|-----------------------|----------------|
| Storage temperature | -40 °C...85 °C | Operating temperature | -40 °C...70 °C |
| Humidity | 40 °C / 93 % rel. humidity, no condensation | | |

Probability of failure

| | |
|-----|-----------------------------|
| B10 | 65.000 AC15: 250Vac/2.5A |
|-----|-----------------------------|

Rated data UL

| | |
|-------------------------|---------|
| Certificate No. (cURus) | E224238 |
|-------------------------|---------|

Control side

| | | | |
|-----------------------|----------------|--------------------------------|---------------------|
| Rated control voltage | 230 V AC | Rated current AC | 3.5 mA |
| Power rating | 813 mVA | Pull-in/drop-out voltage, typ. | 172.5 V / 34.5 V AC |
| Coil resistance | 32500 Ω ± 15 % | Status indicator | red LED |

Load side

| | | | |
|---|---|---|---|
| Rated switching voltage | 250 V AC | Continuous current | 8 A |
| Max. switching frequency at rated load | 0.1 Hz | Min. switching power | 1 mA @ 24 V, 10 mA @ 12 V, 100 mA @ 5 V |
| Inrush current | 15 A / 4 s | AC switching capacity (resistive), max. | 2000 VA |
| DC switching capacity (resistive), max. | 192 W @ 24 V | Switch-on delay | ≤ 10 ms |
| Switch-off delay | ≤ 6 ms | Contact type | 2 CO contact (AgNi) |
| Mechanical service life | AC coil 5 x 10 ⁶ switching cycles, DC coil 10 x 10 ⁶ switching cycles | | |

General data

| | | | |
|-----------------------|-------------|--------------------------------------|-----|
| Test button available | Yes | Mechanical switch position indicator | Yes |
| Colour | Transparent | UL 94 flammability rating | V-2 |

Insulation coordination

| | | | |
|---|--------------------------------|--|-----------------------------|
| Rated voltage | 250 V | Pollution severity | 2 |
| Surge voltage category | III | Insulating material group | IIIa |
| Clearance and creepage distances for control side - load side | ≥ 8 mm | Dielectric strength for control side - load side | 5 kV _{eff} / 1 min |
| Dielectric strength of neighbouring contacts | 2.5 kV _{eff} / 1 Min. | Dielectric strength of open contact | 1 kV _{eff} / 1 min |
| Impulse withstand voltage | 5 kV (1.2/50 μs) | | |

RCI484T30

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Further details of approvals / standards

| | | | |
|-----------------------|--------------------|-------------------------|----------------|
| Standards | IEC 61810-1, UL508 | Certificate No. (CSA) | 249409-2426937 |
| Certificate No. (VDE) | 40018043 | Certificate No. (cURus) | E224238 |

Connection data

| | | | |
|------------------------|--------------------|-----------------|------|
| Wire connection method | Plug-in connection | Pitch in mm (P) | 5 mm |
|------------------------|--------------------|-----------------|------|

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC001437 | ETIM 7.0 | EC001437 |
| ETIM 8.0 | EC001437 | ECLASS 9.0 | 27-37-16-01 |
| ECLASS 9.1 | 27-37-16-01 | ECLASS 10.0 | 27-37-16-01 |
| ECLASS 11.0 | 27-37-16-01 | | |

Approvals

Approvals



| | |
|-----------------------|---------|
| ROHS | Conform |
| UL File Number Search | E224238 |

Downloads

| | |
|---|---|
| Approval/Certificate/Document of Conformity | EU Konformitätserklärung / EU Declaration of Conformity |
| Engineering Data | CAD data – STEP |
| Engineering Data | EPLAN, WSCAD |
| Catalogues | Catalogues in PDF-format |
| Brochures | |


RCI484T30

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com


Drawings

Wiring diagram

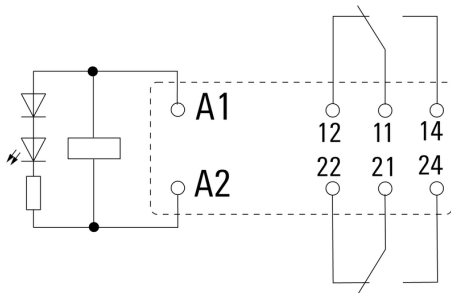


View of Pins from below


Graph

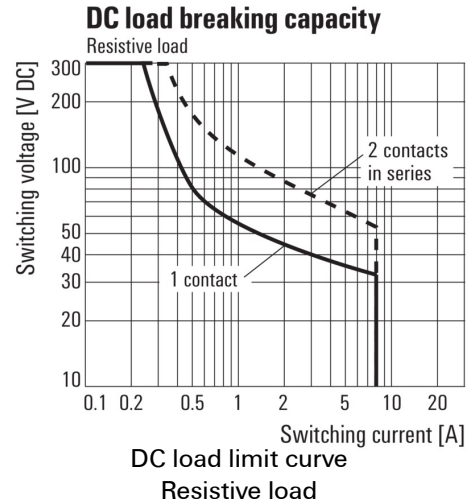


Graph

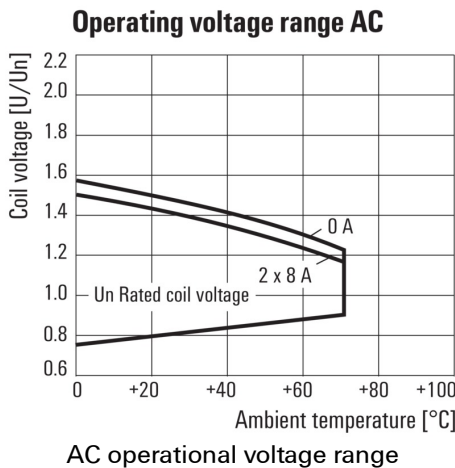

Graph

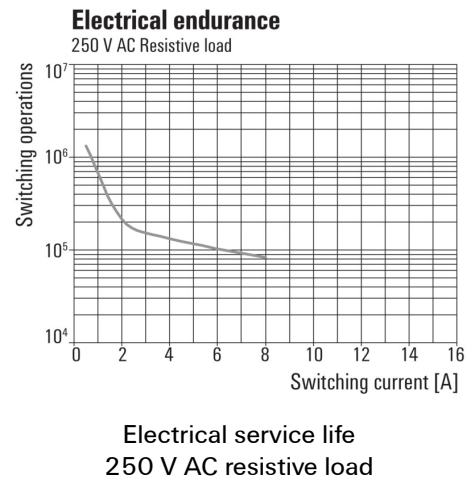


Dimensional drawing

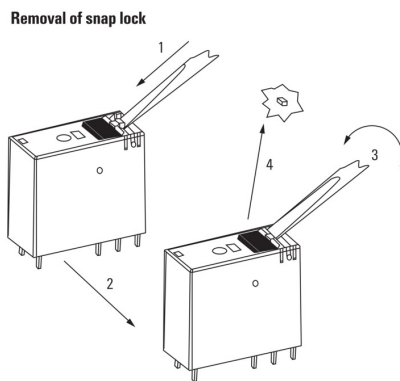

Detailed drawing
 Removal of the test button detent lock

Derating curve

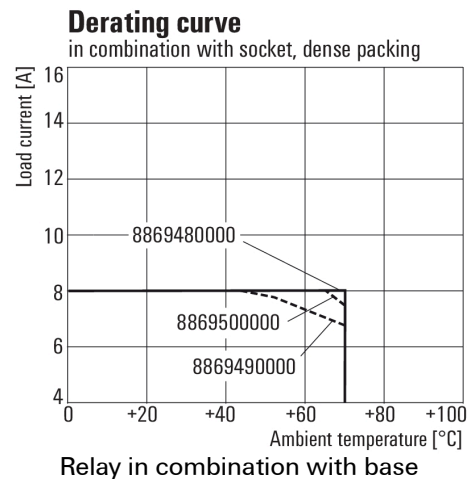


RCI484T30

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Drawings

Dimensional drawing

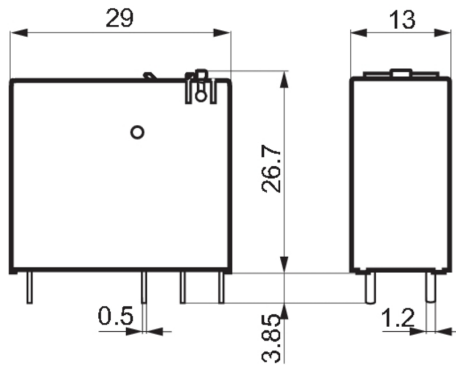

Miscellaneous

| | RCI | | | | |
|--|-----|--|--|---------------------|------------------------|
| Type RIDER Control Industrial | | | | | |
| Type of construction 3 16 A pinning 5 mm 4 8 A, pinning 5mm | | | | | |
| Type of contact 1 1 CO without push button 2 2 CO without push button 7 1 CO with push button 8 2 CO with push button | | | | | |
| Contact material 4 AgNi 90/10 | | | | | |
| | | | | Coil voltage | |
| | | | | 012 | 12 V DC |
| | | | | 024 | 24 V DC |
| | | | | 048 | 48 V DC |
| | | | | 110 | 110 V DC |
| | | | | AB2 | 12 V DC + LED + diode |
| | | | | AC4 | 24 V DC + LED + diode |
| | | | | AE8 | 48 V DC + LED + diode |
| | | | | BB0 | 110 V DC + LED + diode |
| | | | | 524 | 24 V AC |
| | | | | 615 | 115 V AC |
| | | | | 730 | 230 V AC |
| | | | | R24 | 24 V AC + LED |
| | | | | S15 | 115 V AC + LED |
| | | | | T30 | 230 V AC + LED |

Type codes