



Figure similar

MLFB-Ordering data

6SL3211-1PE21-8UL0

Client order no. :

Item no. :

Order no. :

Consignment no. :

Offer no. :

Project :

Remarks :

| Rated data | | General tech. specifications | |
|-------------------------------------|--------------------------|--|--|
| Input | | Power factor λ | 0.85 |
| Number of phases | 3 AC | Offset factor $\cos \varphi$ | 0.95 |
| Line voltage | 380 ... 480 V ± 10 % | Efficiency η | 0.97 |
| Line frequency | 47 ... 63 Hz | Sound pressure level (1m) | 62 dB |
| Rated current (LO) | 22.20 A | Power loss | 0.20 kW |
| Rated current (HO) | 19.80 A | Filter class (integrated) | - |
| Output | | Ambient conditions | |
| Number of phases | 3 AC | Cooling | Internal air cooling |
| Rated voltage | 400 V | Cooling air requirement | 0.009 m ³ /s (0.325 ft ³ /s) |
| Rated current (LO) | 18.00 A | Installation altitude | 1000 m (3280.84 ft) |
| Rated current (HO) | 13.20 A | Ambient temperature | |
| Max. output current | 27.00 A | Operation LO | -5 ... 40 °C (23 ... 104 °F) |
| Rated power IEC 400V (LO) | 7.50 kW | Operation HO | -5 ... 50 °C (23 ... 122 °F) |
| Rated power NEC 480V (LO) | 10.00 hp | Transport | -25 ... 55 °C (-13 ... 131 °F) |
| Rated power IEC 400V (HO) | 5.50 kW | Storage | -25 ... 55 °C (-13 ... 131 °F) |
| Rated power NEC 480V (HO) | 7.50 hp | Relative humidity | |
| Pulse frequency | 4 kHz | Max. operation | 95 % RH, condensation not permitted |
| Output frequency for vector control | 0 ... 200 Hz | | |
| Output frequency for V/f control | 0 ... 550 Hz | | |

Overload capability

Low Overload (LO)

1.1 x rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s 1.5 x rated output current (i.e. 150 % overload) for 3 s with a cycle time of 300 s

High Overload (HO)

1.5 x output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s 2 x output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s



Figure similar

MLFB-Ordering data

6SL3211-1PE21-8UL0

Mechanical data

| | |
|----------------------|---------------------|
| Degree of protection | IP20 / UL open type |
| Size | FSB |
| Net weight | 3.60 kg (7.94 lb) |
| Width | 154 mm (6.06 in) |
| Height | 345 mm (13.58 in) |
| Depth | 171 mm (6.73 in) |

Connections

Line side


| | |
|-------------------------|---|
| Version | Plug-in screw terminals |
| Conductor cross-section | 1.50 ... 6.00 mm ² (AWG 16 ... AWG 10) |

Motor end

| | |
|-------------------------|---|
| Version | Plug-in screw terminals |
| Conductor cross-section | 1.50 ... 6.00 mm ² (AWG 16 ... AWG 10) |

Converter losses to EN 50598-2*

| | |
|--|----------|
| Efficiency class | IE2 |
| Comparison with the reference converter (90% / 100%) | -67.12 % |

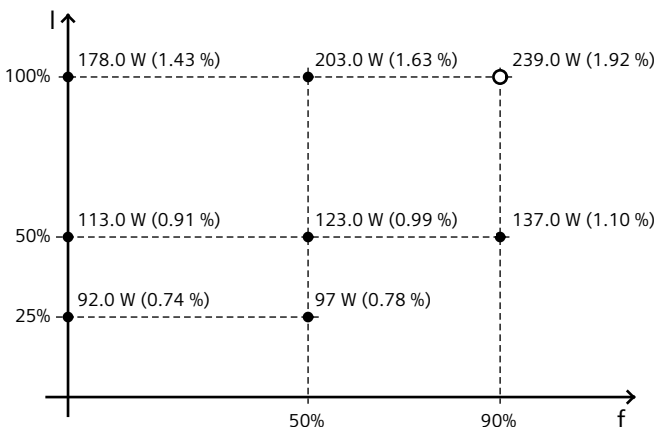

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*converted values

Max. motor cable length

| | |
|------------|-------------------|
| Shielded | 50 m (164.04 ft) |
| Unshielded | 100 m (328.08 ft) |

Standards

Compliance with standards: UL, cUL, CE, C-Tick (RCM), SEMI F47

CE marking: Low-voltage directive 2006/95/EC